
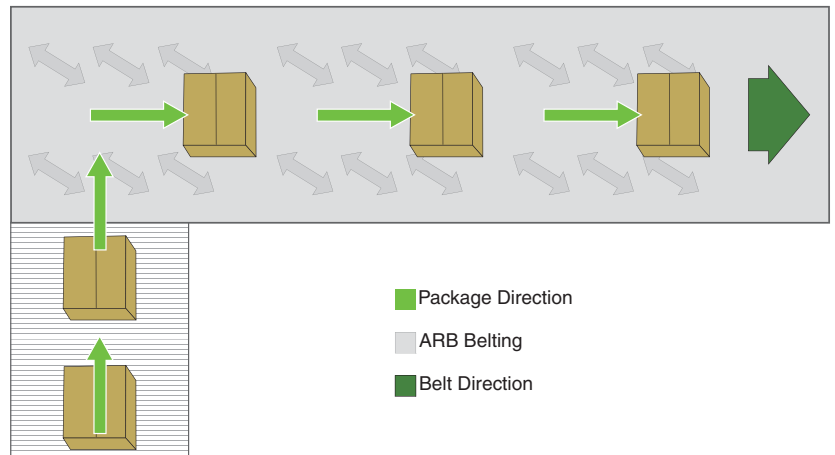


Intralox 90 Degree Transfer

Are you looking for ways to successfully negotiate corners in your plant? Do you want to change product orientation? Competing technologies can cause damage by pushing the product too hard or are unable to promise a smooth, straight transfer, resulting in product jams and production stoppages.

The Intralox solution from the award winning line of Activated Roller Belt™ technology allows you to negotiate 90 degree transfers with a product orientation change with no resulting product damage or jams, all while maintaining a small footprint.

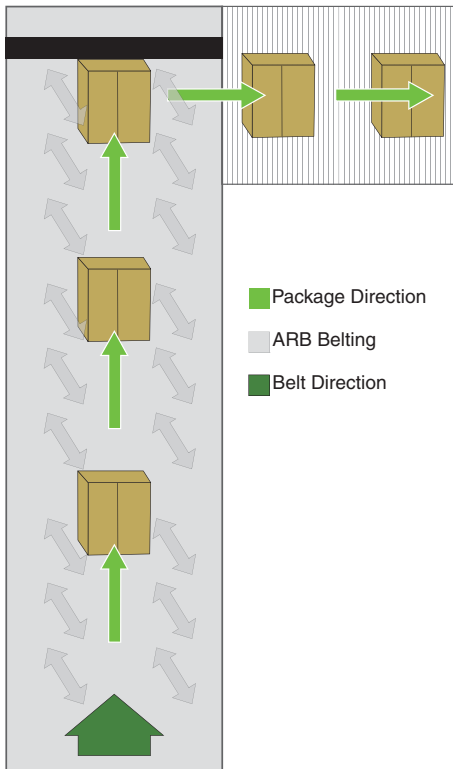

Key Benefits

- Handles a variety of products with minimal impact
- Eradicates production jams and costly downtime due to skewing of product
- Reduces maintenance needs
- Covers a small footprint



 [Click photo to see video](#)

STANDARD OPERATIONAL SPECIFICATIONS

Product bottom surface	Product should have a flat, smooth, and rigid bottom surface
Product size	Minimum = 100 x 100 mm or 4 x 4 in
Product length (range)	No restrictions
Product width (range)	No restrictions
Product height (maximum)	Up to 3x product width
Product weight	Greater than 1kg or 2.2 pounds
Product infeed throughput (maximum)	80 products per minute (dependent on product length)

EQUIPMENT INFORMATION		STANDARD COMPONENTS	
Length/ Width/ Height	Designed to specifications	Motor	SEW (or equivalent)
Belt Speed	Maximum 60-80 meters/min or 196-262 ft/min (dependent on product specifications)	Frequency Inverter	SEW Movimot or supplied by customer
Construction	Frame - painted carbon steel or stainless steel	Adjustable Feet	+/-50 mm or 1.97 in
Frame Color	As specified by customer	Conveyor Belt	Intralox Modular Plastic Conveyor belt
Environment	Dry and clean environment	MAINTENANCE	
Temperature Range	7°C - 50°C or 45°F - 122°F	Easy maintenance with Intralox belt technology	
Conforms to CE regulations and comes with conformity declaration		Mechanical system with no electronic components (except drive)	

If you require a solution not covered by the listed options in this table, contact us to discuss a customized solution.

If you would like more details about how the Intralox 90 Degree Transfer can help you increase throughput while maintaining simplicity, please call us or visit www.intralox.com. Our customer service teams are trained in your industry and speak your native language.

Additional country- and industry-specific free phone numbers available at intralox.com

INTRALOX, L.L.C. USA
New Orleans, LA
1-888-422-2358
+504-733-0463

INTRALOX, L.L.C. EUROPE
Amsterdam, The Netherlands
+800-5445-5445
+31-(0)20-540 36 00

INTRALOX SHANGHAI LTD.
Shanghai, China
Northern: 10800-711-0100
Southern: 10800-110-0100

INTRALOX, L.L.C. JAPAN
0120-779-040

INTRALOX LTD. (UK)
0800-894392

INTRALOX AUSTRALIA PTY. LTD.
1800-128742

INTRALOX BRASIL LTDA.
0800-771-4325

