
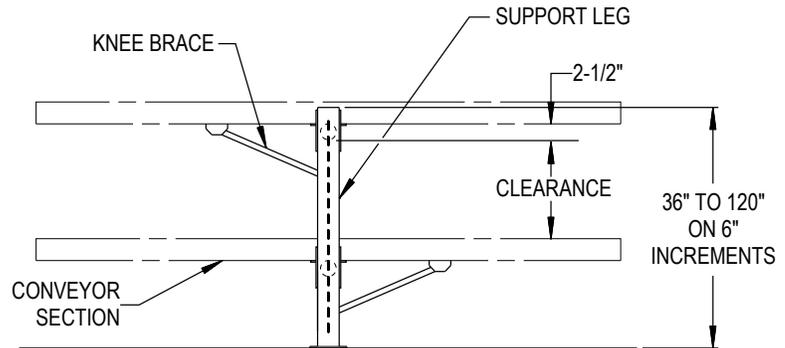


POLY-TIER SUPPORT

Poly-tier supports provide sturdy support for multi-level conveyor lines. Heights available from 36 in. to 120 in. in 6 in. increments. 1 1/2 in. I.D. (1.9 in O.D.) crosspipe assembly mounted to 1 3/4 in. x 4 in. x 7 ga. steel support legs. Capacity: 1500 lbs. per crosspipe–4500 lbs. per set of legs. Supplied for overall conveyor widths from 10 in. to 42 in. wide. Knee braces are supplied to provide extra stability to support.



- Used In Place of LS or MS Supports Only
- Conveyor Widths 10 in. to 42 in. Wide
- 36 in. to 120 in. Support Height
- Sturdy Support for Multi-level Lines
- Available for Most Horizontal Power and Gravity Conveyors
- Contact Factory for Specific Application and Available Sizes

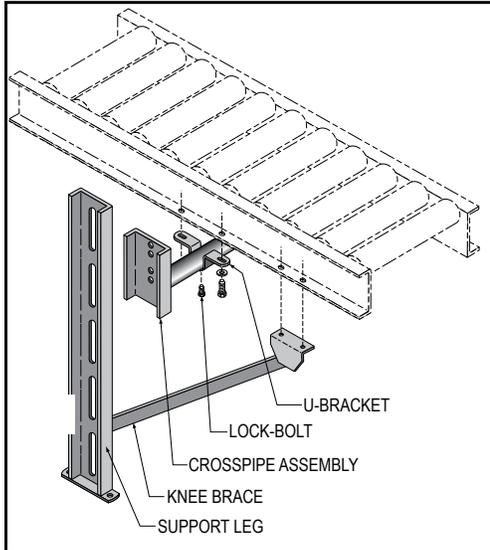

CEILING HANGERS

Ceiling Hangers provide safe and sturdy means of gaining high conveyor elevations. Used when maximum utilization of floor space is needed or when required height exceeds floor support capability. 5/8 in. fully threaded steel rod connects to 1 1/2 in. I.D. (1/9 in. O.D.) support which bolts to underside of conveyor with "U" brackets. Ceiling Hangers can be supplied with gravity or powered conveyors. It is recommended that guard rails be used on conveyors that are ceiling hung.

- 5/8 in. dia. x 8 ft. Long Unplated Fully Threaded Rod
- Sturdy Crosspipe Mounts to Underside of Bed Section
- Contact Factory for Available Sizes

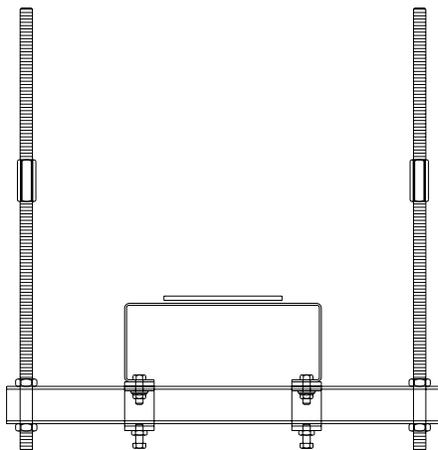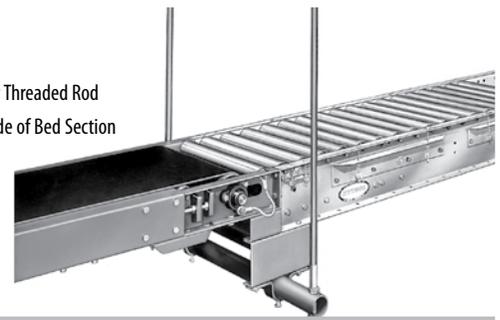

NOTE: Coupling Nut for Over 8 ft. Long Rods